Stellar GeForce RTX™ 5080 OC

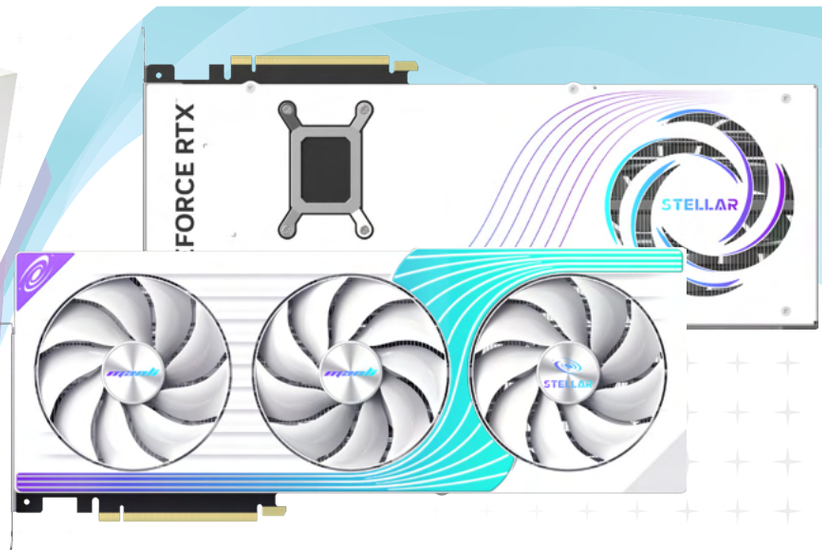

1801 AI TOPS	**2295 MHz ~ 2640 MHz**
16 GB GDDR7	**Multiple ARGB** Lighting Control System

Chipset	
Product name	Manli Stellar GeForce RTX 5080 OC
Part number	M-N5085O/D716G-M3629
NVIDIA CUDA® Cores	10752

GPU Clock	
Base	2295 MHz
Boost	2640 MHz

Graphics Processor	
Shader Cores	Blackwell
Tensor Cores (AI)	5th Gen / 1801 AI TOPS
RT Cores	4th Gen / 171 TFLOPS
DLSS	DLSS 4

Memory Specifications	
Standard memory Config	16GB GDDR7
Memory clock	15000 MHz
Memory bus width	256 bit
Peak memory bandwidth	Up to 960 GB/s
Effective memory clock	30.0 Gbps

Display /Interface	
Maximum resolutions	7680 x 4320
Display connectors	HDMI + 3 x DP
PCI express interface	PCI Express 5.0

Thermal /Component power	
TGP(Total Graphics Power)	360W
Slots	3.5-Slot
Card dimension (Included fan)	371 x 161 x 70mm
Card dimension (Without bracket)	360 x 147 x 70mm
Maximum GPU temperature	88 °C
Cooling design	VC Heatsink with Triple Cooler
Power connector	1 x PCIe Gen5 16-pin

Packaging	
Box size	447 x 256 x 112mm
Product net weight	2.22 kg

System Requirement

> PCI Express® graphics slot required
> Internet connection and 2 GB available disk space for driver installation required
> System space for a 4-slot card required
> Recommend PCIe CEM 5.1 compliant PSU
> 850W system power supply required
> 32 GB system memory recommended
> Microsoft® Windows® 11 64-bit or Linux 64-bit

Key Features

> Dedicated Ray Tracing Cores
> Dedicated Tensor Cores
> NVIDIA DLSS
> Game Ready and NVIDIA Studio Drivers
> NVIDIA® App
> NVIDIA Broadcast
> NVIDIA G-SYNC®
> NVIDIA GPU Boost™
> PCI Expresse® Gen 5
> Microsoft DirectX® 12 Ultimate
> Vulkan 1.4, OpenGL 4.6
> HDCP 2.3
> DisplayPort 2.1b with UHBR20: up to 4K at 480Hz or 8K 165Hz with DSC
> As specified in HDMI 2.1b: up to 4K 480Hz or 8K 120Hz with DSC, Gaming VRR, HDR
> Windows 11 Dynamic Lighting and motherboard RGB lighting control
> Fan-stop function at idle state to reduce noise and conserve energy

Included In The Box

> Lighting connection cable
> Graphics card manual
> 16PIN to 3*8PIN power cable
> Graphics card supporting pole

*All product photos and Specifications are subjected to change without prior notice.

www.manli.com

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE
The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.